




FREECAP®

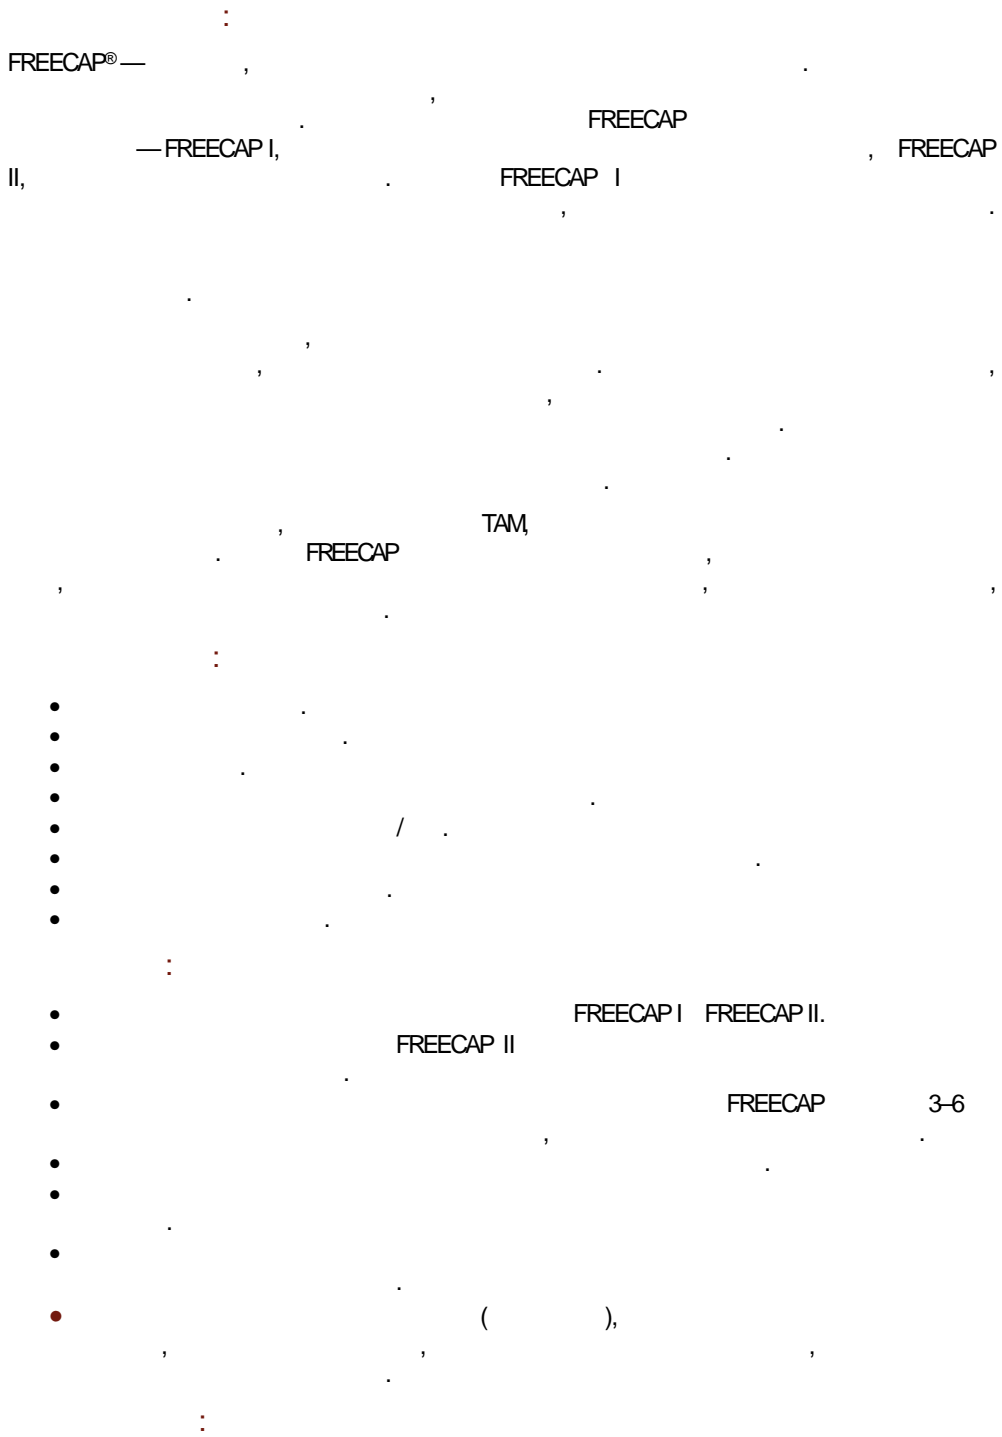

50 °F/10 °C 575 °F/302 °C.
10 000 psi/ 680,5

FREECAP®

FREECAP I

1 6

1,8


3 9

FREECAP II

0,3 0,9

API.

2,88	73,2	4,13–5,25	104,9–133,4
3,50	88,9	4,75–5,88	120,6–149,4
4,00	101,6	5,25–6,25	133,4–158,8
4,50	114,3	5,63–7,00	143–177,8
5,00	127	6,25–7,25	158,8–184,1
5,50	139,7	7,00–8,13	177,8–206,5
6,63	168,3	8,00–9,25	203,2–235
7,00	177,8	8,00–9,25	203,2–235
7,63	193,7	9,25–10,25	235–260,3
9,63	244,5	11,63–14,38	295,4–365,3

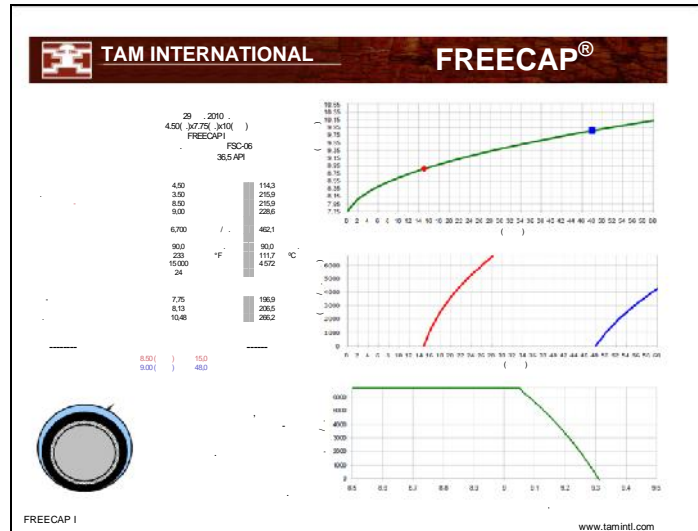

*

FREECAP



FREECAP®

FREECAP

	200%	4,5 x 5,75 (114,3 -146) – 7,66 (194,6)
	70-150°F (21-66°C); 150-220°F (66-104°C); 220-375°F (104-191 °C), 375- 575°F (191-302°C)	
*	5 17	
	1-, 3-, 5-, 10-, 15-, 20- 30 (25-, 76-, 127-, 254-, 381-, 508- 762)	
	68 1020	
	30 /30	30
		/30
	: 9,5 (3/8")	
	6,4 (1/4")	

*